


CL-WSLC (2'x2')

LED Ceiling Fixture



High efficiency low-profile dimmable LED ceiling fixture for general purpose applications, utilizing the latest in LED technology for optimal light output at minimal power draw.

Housing built from powder-coated 20 gauge steel. Lighting white acrylic lens with superior LED diffusing properties creates a uniform light source void of hot spots or luminance fluctuations.

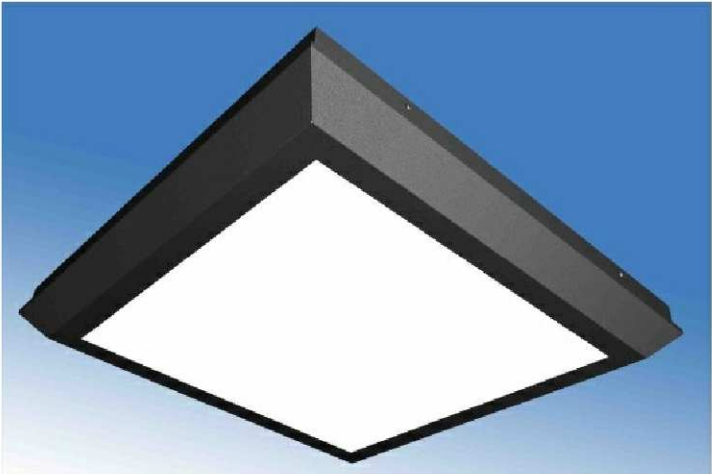

CL-WSLC (2'x2')

All fixtures CSA approved.

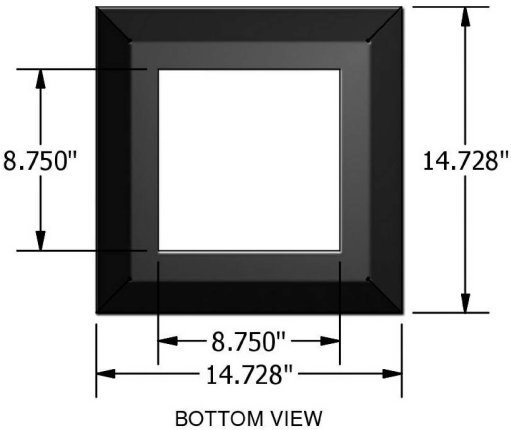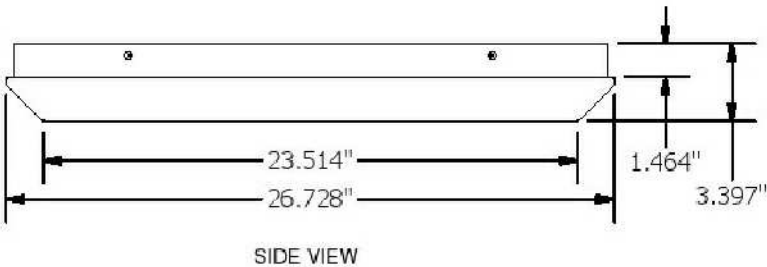

Ordering Logic (Choose from available options)

Model	Voltage	Correlated Colour Temperature	Lumen Output	Lens	Fixture Colour
CL-WSLC	☐ 120-120V ☐ 277 - 277V ☐ 347 - 347V	☐ 30 - 3000K ☐ 35 - 3500K ☐ 40 - 4000K ☐ 50 - 5000K	☐ 3900lm ☐ 6600lm	☐ OP - LED White Acrylic	☐ TB - Texture Black ☐ TW - Textured White ☐ SP - Other (Please Specify)